


Sterling®
BY SPIEL ASSOCIATES INC.

Digibinder Super-C

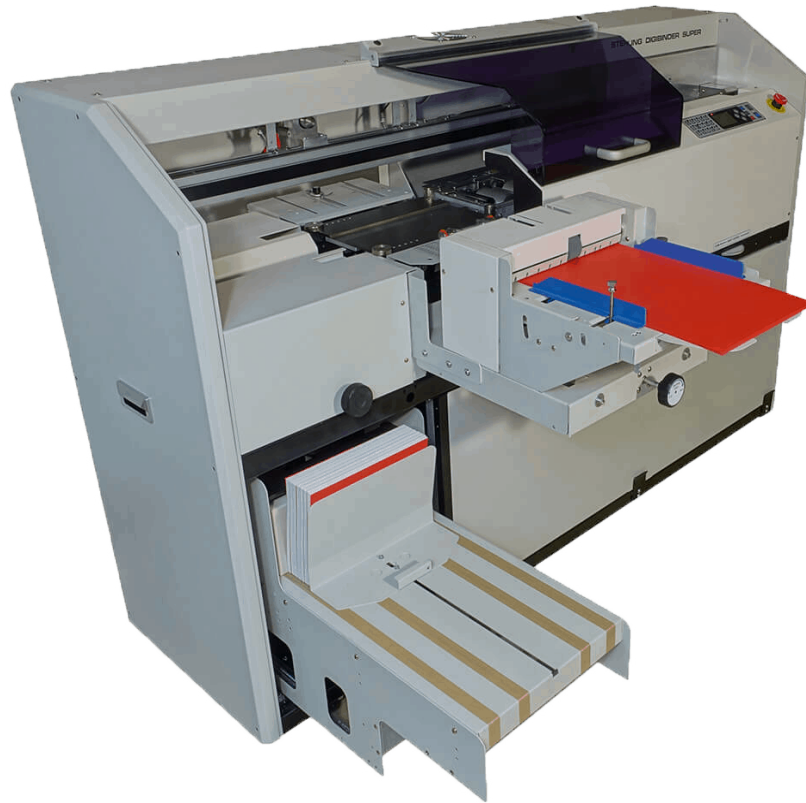

The Sterling® DigiBinder Super-C has the same features as The Digibinder and Digibinder Plus, with added automation. The machine includes an automatic cover feeder and vertical stacker. There are two glue pots, one for side gluing and one with twin glue rollers which allows for an even glue application as does a third, metering roller to smooth out the glue. The extra heavy duty roughing blade ensures the binding of coated, oil infused, and UV coated stock.

The DIGIBINDER® SUPER-C is a completely self-adjusting perfect binder. The pneumatic clamp and nipper adjust automatically. A compressor is included. Bind a thin book, then a thick book, without any adjustments whatsoever. Bind two sheets to over two inches thick.

The machine may be run in manual mode, without the cover feeder, semi-automatic mode where a button needs to be pressed for the machine to cycle, or automatic mode which cycles the machine as soon as the book is placed in the clamp.

No touch perfect binding is here with The STERLING DIGIBINDER SUPER-C.

Sterling®
BY SPIEL ASSOCIATES INC.

Digibinder Super-C




SPIEL
ASSOCIATES INC.
877-BINDERY




Stacker



Roughing Blade

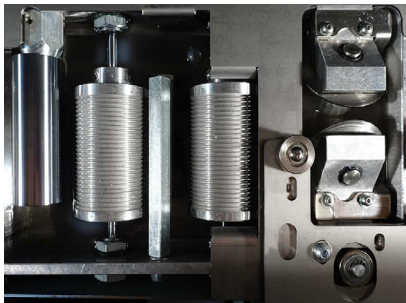

Glue Pots

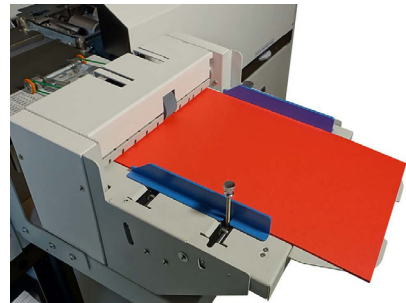

Cover Feeder

TECHNICAL SPECIFICATIONS

Max Speed:	Up to 300 BPH
Maximum Book Thickness:	2-1/4" / 57 mm
Minimum Book Thickness:	2 sheets
Maximum Spine Length:	12.5" / 32 cm
Maximum Cover Size:	12.5" X 27" / 315x680 mm
Power:	220 Volts, Single Phase, 17 AMPS
Weight:	990 LBS./450 Kg
Dimensions:	73" L, 54" W, 48" H 1854mm L, 1372mm W, 1219 mm H