




STERLING DIGIBINDER SUPER-C

The Line of **STERLING DIGIBINDERS** have created a new standard for on demand perfect binding. Never have perfect binders been able to create books of such quality with automatic set up at such an affordable price. It has set the bar high for all perfect binders to follow.

The **DIGIBINDER® SUPER-C** is completely self-adjusting. The pneumatic clamp and nipper adjust automatically. A silent compressor is included. Bind a thin book, then a thick book, without any adjustments whatsoever.

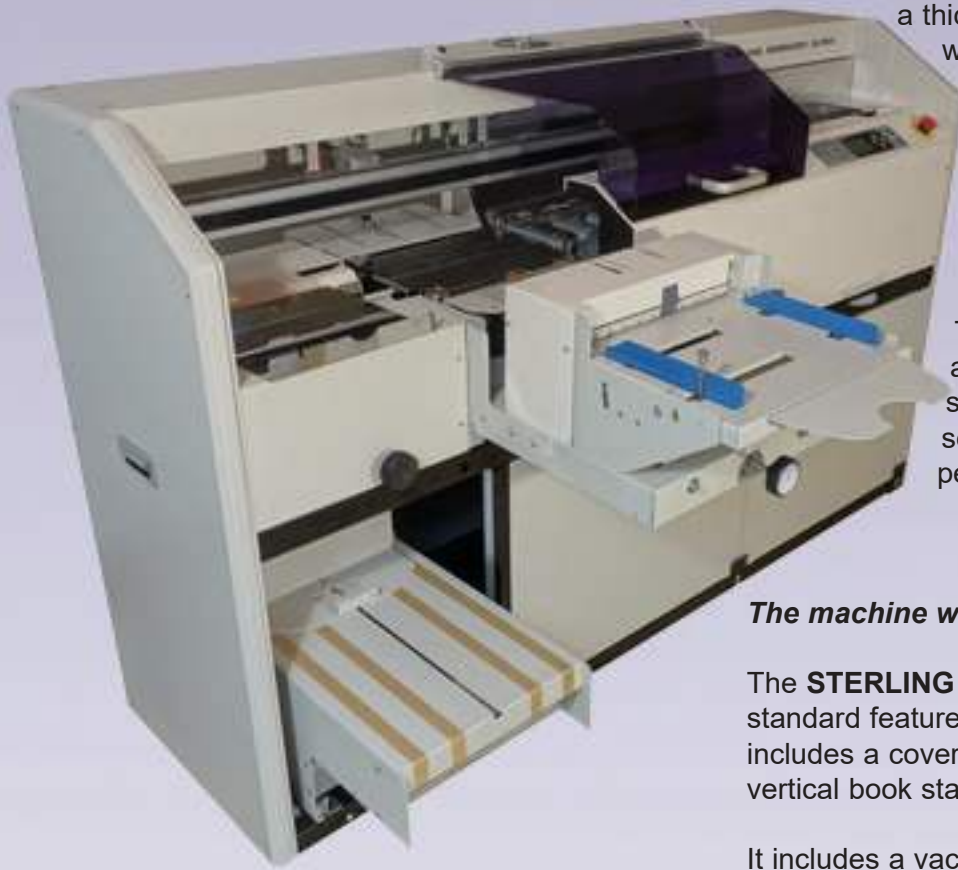

Bind two sheets to two inches thick. The unique, heavy duty roughing blade allows for the binding of offset stock, coated stock, and stock with oil based or wax based inks.

Twin glue rollers ensure an even glue application as does a third, metering roller to smooth out the glue. The machine sports a separate side glue pot for hinge covers. Bind perfectly square backed books or pads.

The machine will bind up to 300 books per hour.

The **STERLING DIGIBINDER SUPER-C** has all of the standard features of all **DIGIBINDERS** plus a few extras: It includes a cover feeder with automatic creasing and a vertical book stacker or a delivery conveyor.

It includes a vacuum waste removal system, which allows for the use of even heavier duty notching pins, which prepare the spine for gluing.

Good for runs of one offs, five hundred, or five thousand, the user friendliness of the **Sterling® Digibinder Super-C** will astound you.

With no jam ups and no set ups, one touch perfect binding is here, with...

THE STERLING DIGIBINDER.

STERLING® DIGIBINDER SUPER-C FEATURES



COVER FEEDER

The automatic cover feeder includes an automatic creasing unit that can put up to ten creases on the cover.



AUTO CLAMP

The clamp adjusts automatically between two sheets and 2 inches. Both the clamp and nipper are pneumatic, run by the supplied silent compressor.



ROUGHING BLADE

The roughing blade has a serrated edge which holds up to four notching pins. This allows for maximum glue penetration.



TWIN GLUE ROLLERS

Two glue rollers saturate the spine with glue. A third metering roller smooths out the glue to the desired thickness.


SIDE GLUING

The Digibinder sports a separate side glue pot. This ensures a perfect line of side glue every time.



NIPPER CONTROL

Controls the height of the nipper. The dwell time can be set up to 3 seconds.



DELIVERY CONVEYOR

The delivery conveyor transports the books into a hopper for easy removal.



COMPRESSOR

A silent compressor is included with The Digibinder Super-C.



WASTE REMOVAL

The Digibinder Super-C includes a vacuum waste removal system. This facilitates deeper roughing and notching, increasing book strength.

SPECIFICATIONS

Speed:	Up to 300 BPH
Maximum Book Thickness:	2" / 50 mm
Minimum Book Thickness:	2 sheets
Maximum Spine Length:	12" / 310 mm
Maximum Cover Size:	12.5" X 27" / 315x680 mm
Power:	220 Volts, Single Phase, 17 AMPS
Dimensions:	75" L, 54" W, 48" H
	190 L, 137 W, 122 cm H
Weight:	990 LBS./450 Kg



**SPIEL
ASSOCIATES, INC.**

180 Atlantic Avenue
Garden City Park, NY 11040
718-392-7900
www.spielassociates.com