

Sterling®
BY SPIEL ASSOCIATES INC.

Digibinder Plus SG



SPIEL
ASSOCIATES INC.
877-BINDERY

The Sterling® DigiBinder Plus SG has created a new standard for on demand perfect binding equipment. Never has an adhesive binder been able to create books of such quality with automatic set up at such an affordable price. It has set the bar high for all perfect binders to follow.

The DIGIBINDER is a completely self-adjusting. The pneumatic clamp and nipper adjust automatically. A compressor is included. Bind a thin book, then a thick book, without any adjustments whatsoever. Bind two sheets to two inches thick.

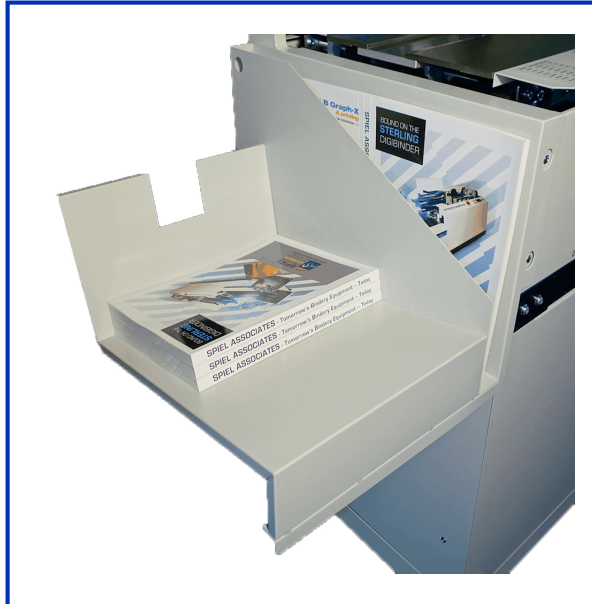


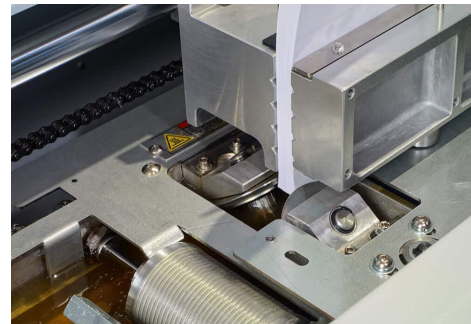
The unique, heavy duty roughing blade allows for the binding of offset stock, coated stock, and stock with oil based or wax based inks.

Twin glue rollers ensure an even glue application as does a third, metering roller to smooth out the glue. The machine side glues for hinge covers and even creates a light hinge due to the nipper pressure, which is adjustable. Bind perfectly square backed books or pads.

The STERLING DIGIBINDER PLUS SG has all of the standard features of The DIGIBINDER® PLUS, including: A stand, which is on casters, as well as a safety cover which will stop the operation of the machine when lifted. More importantly, it includes a vacuum waste removal system, which allows for the use of even heavier duty notching pins, which prepare the spine for gluing.

The Digibinder Plus SG also sports an even heavier duty roughing blade and separate side glue pot, allowing for greater side glue control for hinged covers.


Delivery Tray

Roughing Blade

Side Glue Pot
TECHNICAL SPECIFICATIONS

Max Speed:	Up to 360 BPH
Maximum Book Thickness:	2-1/4" / 57 mm
Minimum Book Thickness:	2 sheets
Maximum Spine Length:	12.5" / 32cm
Maximum Cover Size:	13.4 x 30.75"/34 X 78cm
Power:	220V 1 Phase 12 Amps/2.3kw
Weight:	575 lbs. / 261 kg.
Dimensions:	54.4" L X 35" W X 52" H 1381mm L X 889mm W X 1321 mm H